


Frame ic / Nation ic Topguided window

1-light

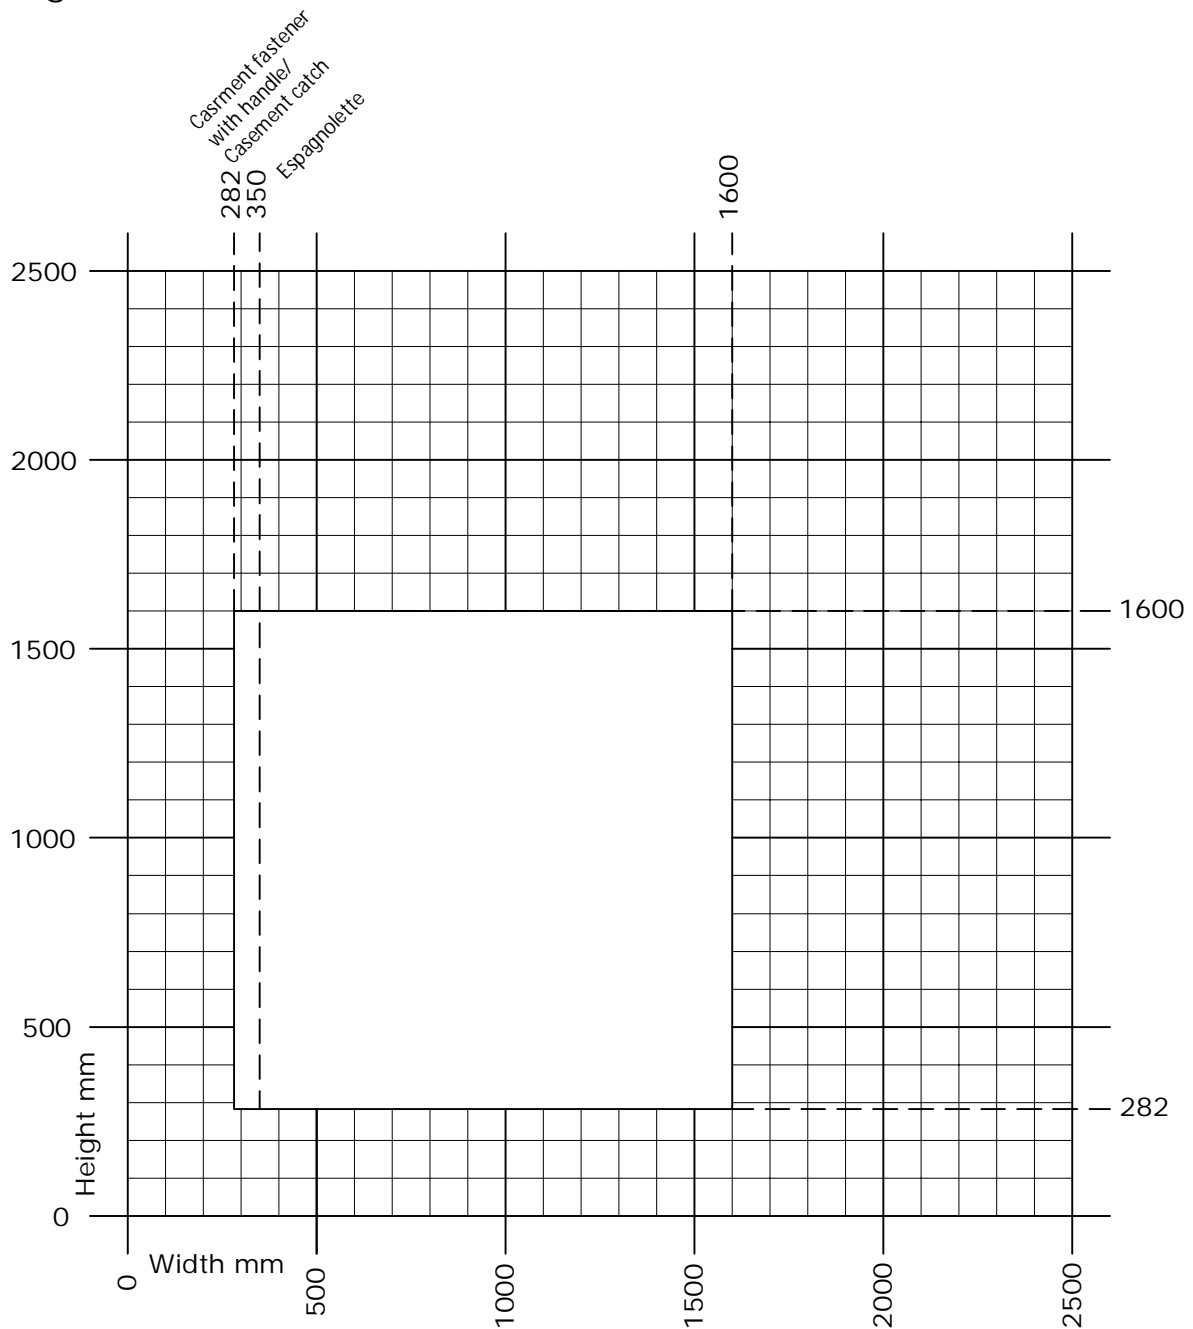


Casement fastener
with handle/

Casement catch: Min. width 282 mm

Espagnolette: Min. width 350 mm

Sash weight max. 80 kg.

 Min. - Max. dim

DK Min. - Max. mål
Topstyret vindue - 1 fag

www.idealcombi.dk

UK Min. - Max. dim
Topguided window - 1 light

www.idealcombi.com

TYPE
Frame ic

Rev. no. 02

Drawing no. UK-FRAic-GRA002

© Idealcombi A/S 2011. This material is the property of and copyright protected by IDEALCOMBI A/S.

idealcombi
Udvikler vinduet