



FRAic_HJL105_210

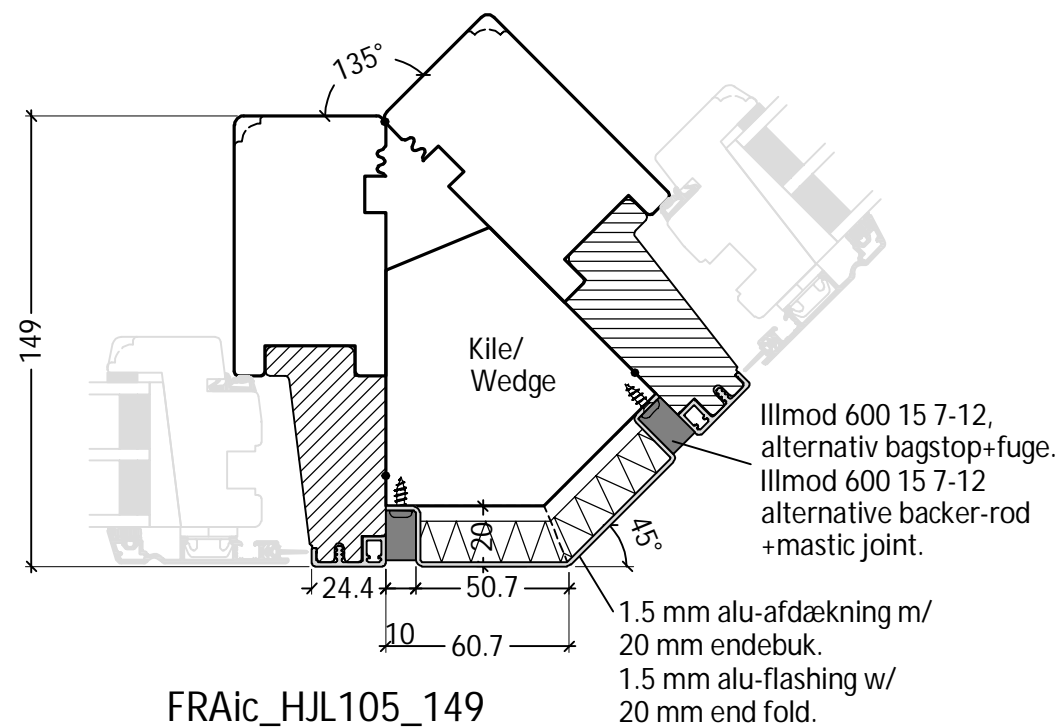


FRAic_HJL105_149

Standard løsning:
 Alu-afdækning og kilerer tilvalg.
 Øvrige montage materialer leveres af montør.
 122 mm karm - HK77.
 149 mm karm - HK76.
 175 mm karm - HK42 + HK75.
 210 mm karm - HK42 + HK74.
 Skrueafstande og skrueplacering som standard montage.

Standard solution:
Alu-flashing and wedge is optional.
Other installation materials by installer.
 122 mm frame - HK77.
 149 mm frame - HK76.
 175 mm frame - HK42 + HK75.
 210 mm frame - HK42 + HK74.
 Fixing points and fixing areas as standard installation.

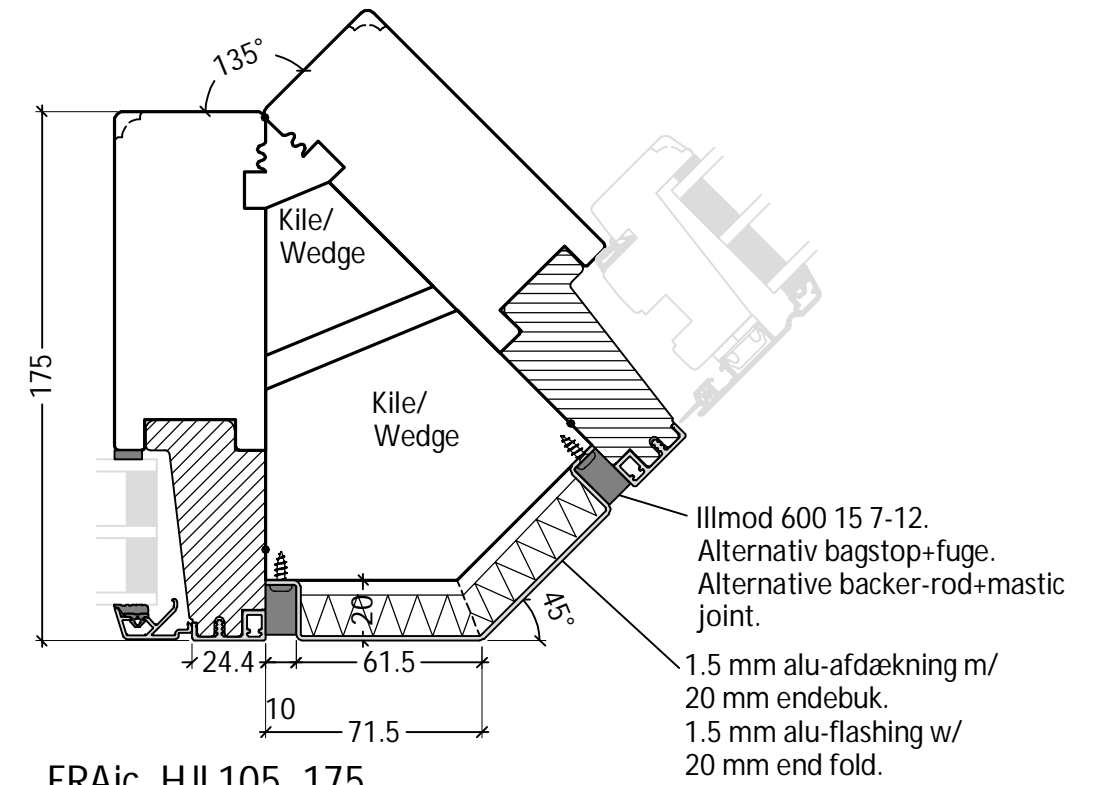

FRAic_HJL105_175

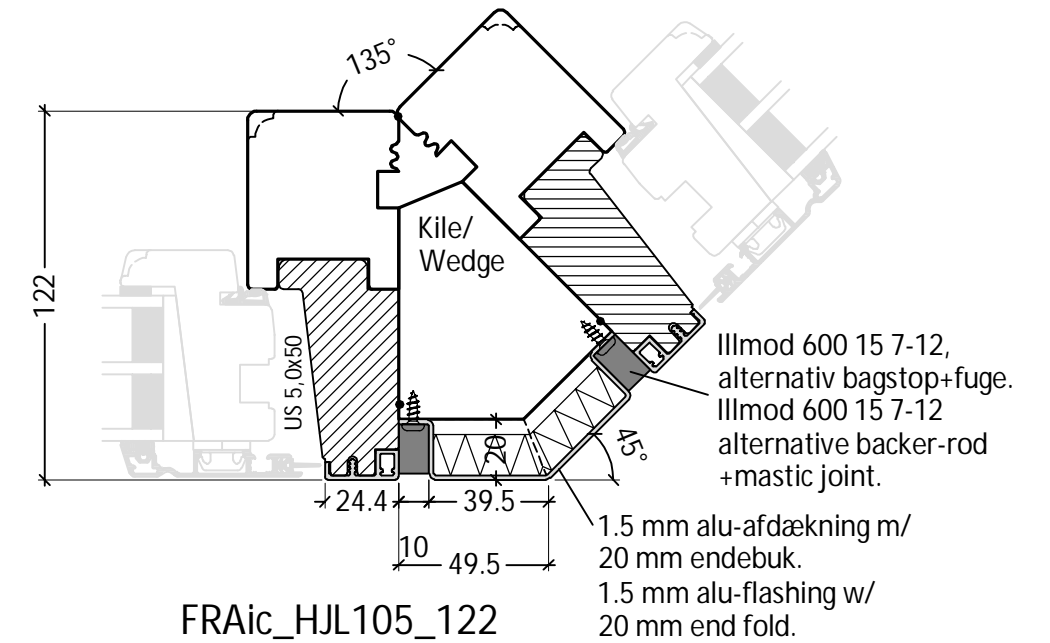

FRAic_HJL105_122

DK	Standard hjørneløsning 45° 122/149/175/210 mm karm med kile	www.idealcombi.dk
UK	Standard corner solution 45° 122/149/175/210 mm frame with wedge	www.idealcombi.com