


FRAic_HJL102_210

Alu vinkel 10x10x2 mm.
Continuous support profile
10x10x2 mm.


Illmod 600 15 7-12.
Alternativ bagstop+fuge.
Alternative backer-rod+mastic
joint.

1.5 mm alu-afdækning m/
20 mm endebuk.
1.5 mm alu-flashing w/
20 mm end fold.

Standard løsning:
Alu vinkler og alu-afdækning er
tilvalg.
Træ stolpe og øvrige montage
materialer leveres af montør.
122 mm karm - 60x60 mm.
149 mm karm - 100x100 mm.
175 mm karm - 125x125 mm.
210 mm karm - 150x150 mm.
Opklodsning, skrueafstande og
skrueplacering som standard montage.



Alternativ løsning:
Alu-afdækning er tilvalg.
Special tilskårede træstolper er tilvalg.
Nogle af typerne kan bestilles ved
Idealcombi.
Øvrige montage materialer leveres af
montør.
122 mm karm - 100.25x100.25 mm.
149 mm karm - 127.25x127.25 mm.
175 mm karm - 153.25x153.25 mm.
210 mm karm - 188.25x188.25 mm.
Skrueafstande og -placering som
standard montage.

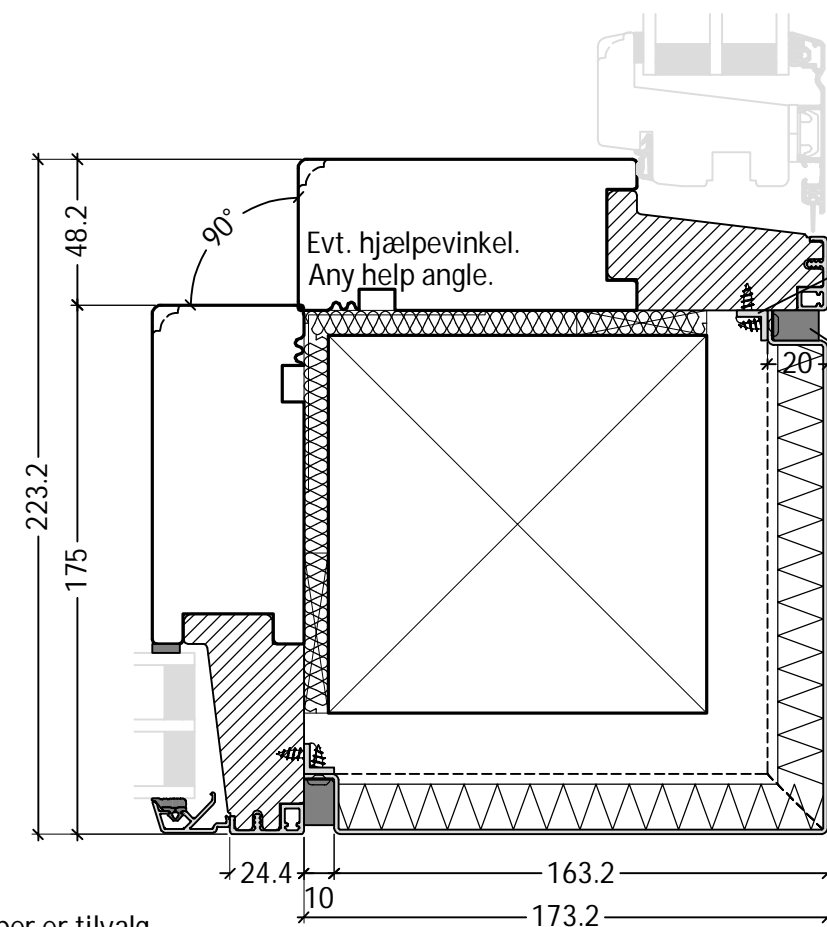


FRAic_HJL102_175

Alu vinkel 10x10x2 mm.
Continuous support profile
10x10x2 mm.

Illmod 600 15 7-12.
Alternativ bagstop+fuge.
Alternative
backer-rod+mastic joint.

1.5 mm alu-afdækning
m/ 20 mm endebuk.
1.5 mm alu-flashing w/
20 mm end fold.

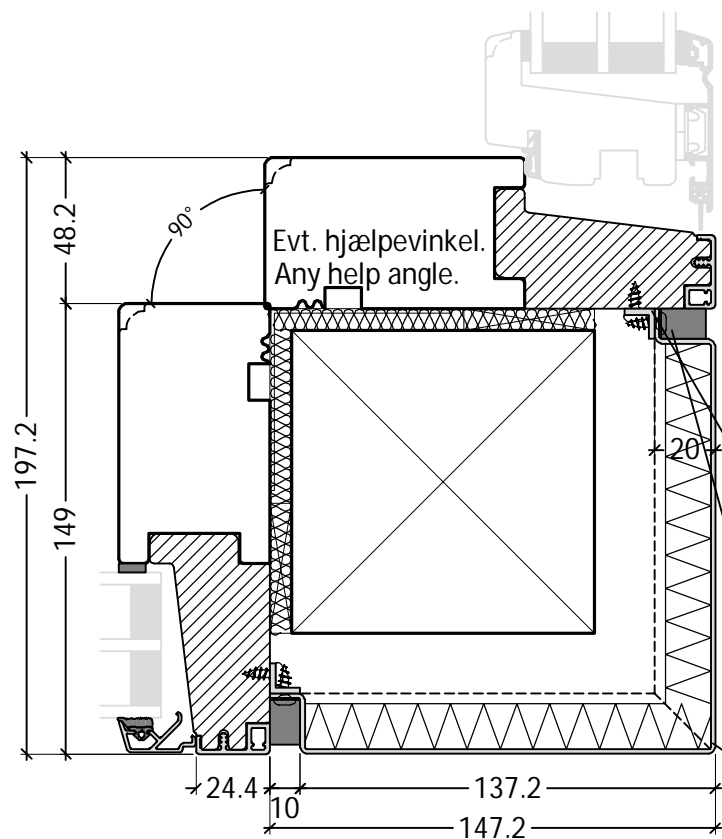

FRAic_HJL102_149


Alu vinkel 10x10x2 mm.
Continuous support profile
10x10x2 mm.

Illmod 600 15 7-12.
Alternativ bagstop+fuge.
Alternative backer-rod+mastic
joint.

1.5 mm alu-afdækning m/
20 mm endebuk.
1.5 mm alu-flashing w/
20 mm end fold.

Standard solution:
**Continuous support profiles and
alu-flashing is optional.**
**Timber post and other installation
materials by instaler.**
122 mm frame - 60x60 mm.
149 mm frame - 100x100 mm.
175 mm frame - 125x125 mm.
210 mm frame - 150x150 mm.
Wedging, fixing points and fixing areas
as standard installation.

Alternative solution:
Alu-flashing is optional.
Special cut wooden post is optional.
Some of the types can be ordered
by Idealcombi.
Other installation materials by
instaler.
122 mm karm - 100.25x100.25 mm.
149 mm karm - 127.25x127.25 mm.
175 mm karm - 153.25x153.25 mm.
210 mm karm - 188.25x188.25 mm.
Fixing points and fixing areas as
standard installation.

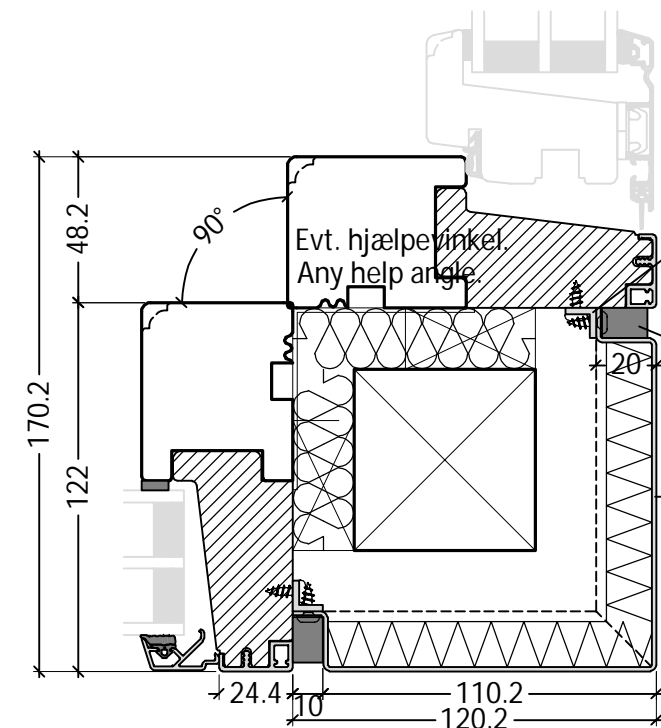

FRAic_HJL102_122

Alu vinkel 10x10x2 mm.
Continuous support profile
10x10x2 mm.

Illmod 600 15 7-12.
Alternativ bagstop+fuge.
Alternative backer-rod+mastic
joint.

1.5 mm alu-afdækning m/
20 mm endebuk.
1.5 mm alu-flashing w/
20 mm end fold.

DK	Standard hjørneløsning 90° 122/149/175/210 mm karm	www.idealcombi.dk
UK	Standard corner solution 90° 122/149/175/210 mm frame	www.idealcombi.com