

FRAic\_HJL108\_210

Alu vinkel 10x10x2 mm.  
Continuous support profile  
10x10x2 mm.


Illmod 600 15 7-12.  
Alternativ bagstop+fuge.  
Alternative backer-rod+mastic  
joint.

1.5 mm alu-afdækning m/  
20 mm endebuk.  
1.5 mm alu-flashing w/  
20 mm end fold.

Standard løsning:  
Alu vinkler og alu-afdækning er  
tilvalg.  
Træ stolpe og øvrige montage  
materialer leveres af montør.  
122 mm karm - Ikke muligt.  
149 mm karm - 50x50 mm.  
175 mm karm - 75x75 mm.  
210 mm karm - 100x100 mm.  
Opklodsning, skrueafstande og  
skrueplacering som standard montage.

Standard solution:  
**Continuous support profiles and  
alu-flashing is optional.  
Timber post and other installation  
materials by instaler.**


122 mm frame - Impossible.  
149 mm frame - 50x50 mm.  
175 mm frame - 75x75 mm.  
210 mm frame - 100x100 mm.  
Wedging, fixing points and fixing areas  
as standard installation.



Alternativ løsning:  
Alu-afdækning er tilvalg.  
Special tilskærede træstolper er tilvalg.  
Nogle af typerne kan bestilles ved  
Idealcombi.  
Øvrige montage materialer leveres af  
montør.  
122 mm karm - 55x55 mm.  
149 mm karm - 82x82 mm.  
175 mm karm - 108x108 mm.  
210 mm karm - 143x143 mm.  
Skrueafstande og -placering som  
standard montage.

Alternative solution:  
**Alu-flashing is optional.**  
Special cut wooden post is optional.  
Some of the types can be ordered  
by Idealcombi.

**Other installation materials by  
instaler.**  
122 mm karm - 55x55 mm.  
149 mm karm - 82x82 mm.  
175 mm karm - 108x108 mm.  
210 mm karm - 143x143 mm.  
Fixing points and fixing areas as  
standard installation.

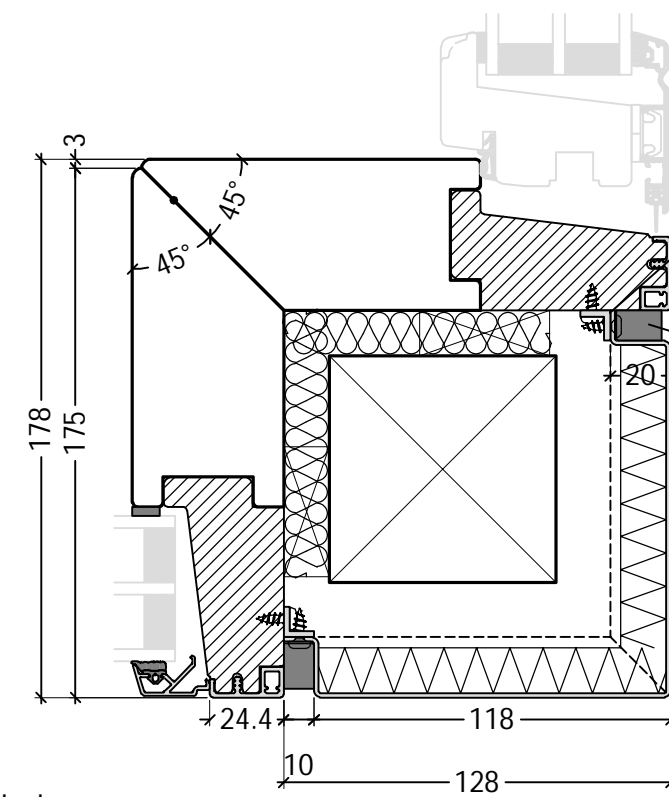


FRAic\_HJL108\_175

Alu vinkel 10x10x2 mm.  
Continuous support profile  
10x10x2 mm.

Illmod 600 15 7-12.  
Alternativ bagstop+fuge.  
Alternative backer-rod+mastic  
joint.

1.5 mm alu-afdækning m/  
20 mm endebuk.  
1.5 mm alu-flashing w/  
20 mm end fold.

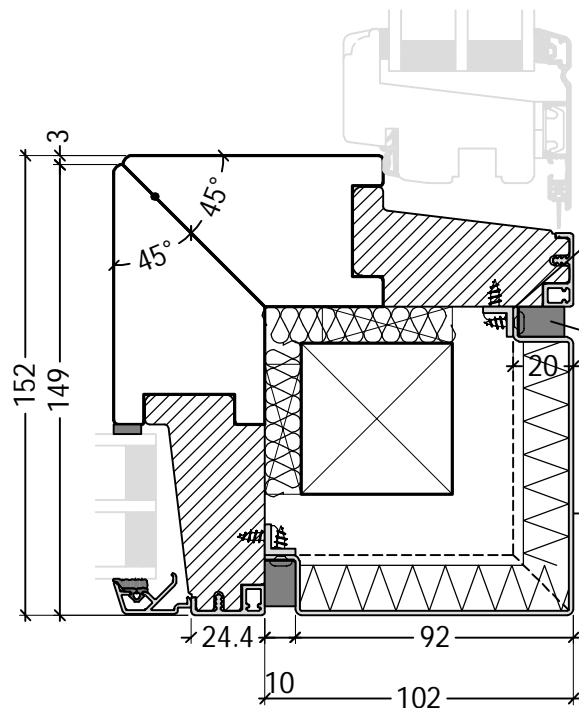


FRAic\_HJL108\_149

Alu vinkel 10x10x2 mm.  
Continuous support profile  
10x10x2 mm.

Illmod 600 15 7-12.  
Alternativ bagstop+fuge.  
Alternative backer-rod+mastic  
joint.

1.5 mm alu-afdækning m/  
20 mm endebuk.  
1.5 mm alu-flashing w/  
20 mm end fold.

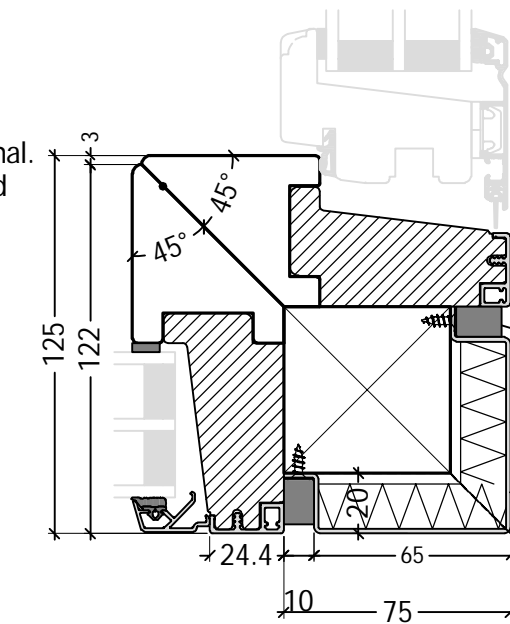

FRAic\_HJL108\_122

Illmod 600 15 7-12.  
Alternativ bagstop+fuge.  
Alternative backer-rod+mastic  
joint.

1.5 mm alu-afdækning m/  
20 mm endebuk.  
1.5 mm alu-flashing w/  
20 mm end fold.

DK	Standard hjørneløsning 90° 122/149/175/210 mm karm med smigskæring	www.idealcombi.dk
UK	Standard corner solution 90° 122/149/175/210 mm bevelled frame	www.idealcombi.com