


Standard løsning:
 Alu-afdækning er tilvalg.
 Special tilskårede træstolper er tilvalg.
 Nogle af typerne kan bestilles ved
 Idealcombi.
 Øvrige montage materialer leveres af
 montør.
 149 mm karm - 127.2x127.2 mm
 175 mm karm - 153.2x153.2 mm.
 Skruer afstande og -placering som
 standard montage.

Standard solution:
Alu-flashing is optional.
 Special cut wooden post is optional.
 Some of the types can be ordered
 by Idealcombi.
 Other installation materials by installer.
 149 mm karm - 127.2x127.2 mm
 175 mm karm - 153.2x153.2 mm.
 Fixing points and fixing areas as
 standard installation.

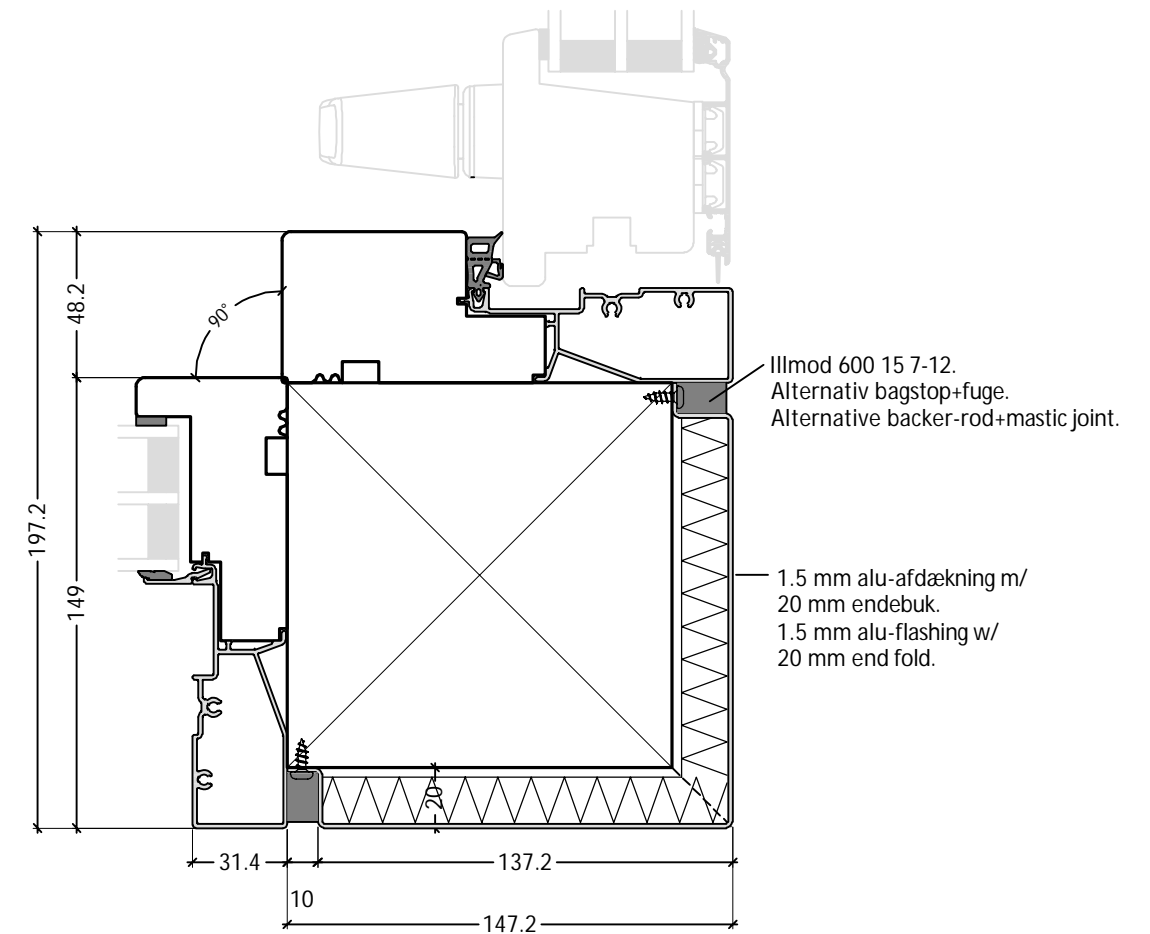

DK Standard hjørneløsning 90° - IC skydedør
 149/175 mm karm

www.idealcombi.dk

UK Standard corner solution 90° - IC sliding door
 149/175 mm frame

www.idealcombi.com

TYPE Frame IC

Rev. no. 01

Drawing no. FRAic-HJL111

© Idealcombi A/S 2011. This material is the property of and copyright protected by IDEALCOMBI A/S.

idealcombi
 Udvikler vinduet