


# Futura+

Acoustic window with secondary sash

Sidehung sash ext. - sidehung secondary sash int.

1-light

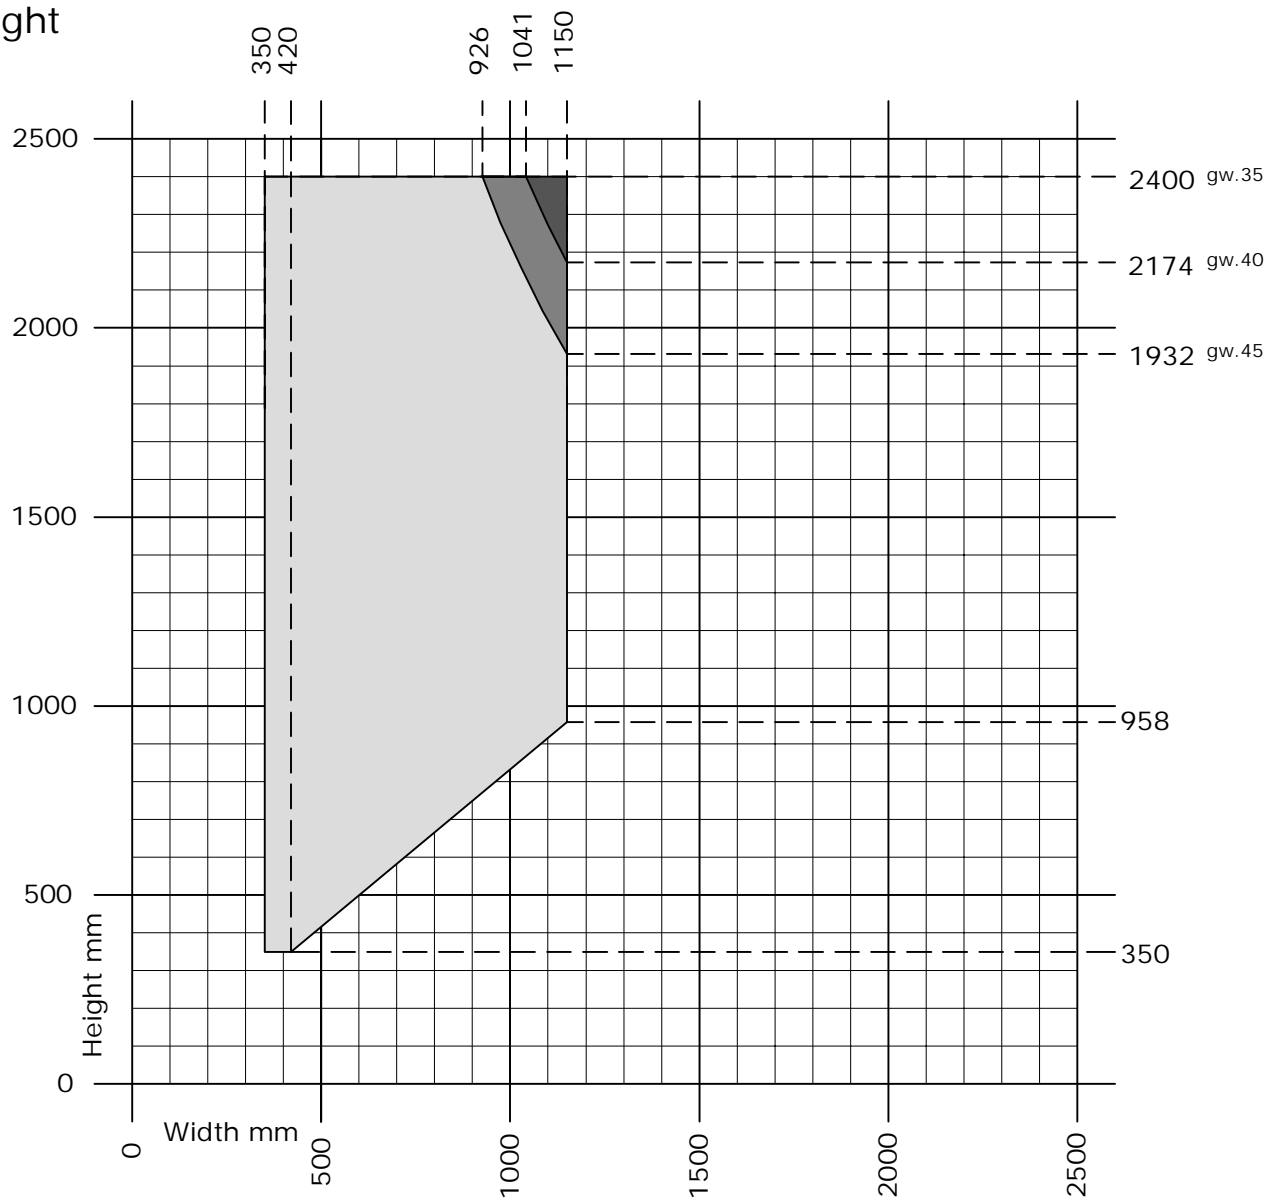

- Min. - Max. dim
- gw.35 Glassweight(gw) external sash: Max. 35 kg/m<sup>2</sup>
- gw.40 Glassweight(gw) external sash: Max. 40 kg/m<sup>2</sup>
- gw.45 Glassweight(gw) external sash: Max. 45 kg/m<sup>2</sup>

Glass secondary sash:  
6, 8 or 10mm thickness.

DK	Lydvindue med forsatsramme - sidehængt ramme udv. - sidehængt forsatsramme indiv. - 1 fag
	Min. - Max. mål tabel <span style="float: right; font-size: 8px;">www.idealcombi.dk</span>
UK	Acoustic window with secondary sash - sidehung sash ext. - sidehung secondary sash int. - 1 light
	Min. - Max. dim table <span style="float: right; font-size: 8px;">www.idealcombi.com</span>

TYPE

Futura+

Rev. no. 01

Drawing no. UK-PLU-GRA031

© Idealcombi A/S 2011. This material is the property of and copyright protected by IDEALCOMBI A/S.

**idealcombi**  
Udvikler vinduet