



Alternativ yderbeklædning:  
 5 og 7,5 mm Glasal  
 6 og 8 mm Eternit  
 6 og 8 mm Stein Colour  
 6 og 8 mm Rocklet

Alternative cladding:  
 5 or 7,5 mm Glasal  
 6 or 8 mm Eternit  
 6 or 8 mm Stein Colour  
 6 or 8 mm Rocklet



3.2 mm oliehardt masonit  
 Afstandsliste/ventilation  
 6 mm Emalit

3.2 mm oil-hardened masonite  
 Spacer/ventilation  
 6 mm Emalit

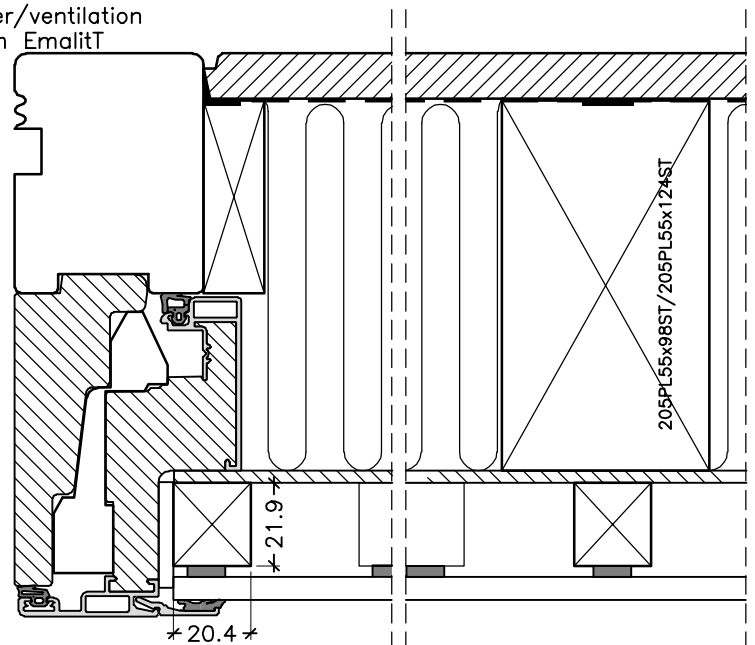

Dræn/ventilation  
 Weephole/Ventilation

Bagplade er løst isat, leveres uden isolering og dampspærre.  
 MDF panel is fitted loosely. Insulation and DPM by others.

DK Standard fylding/brystning  
 Ventilert og fuld isoleret – 12 mm bagplade

[www.idealcombi.dk](http://www.idealcombi.dk)

UK Standard panel/spandrel  
 Ventilated and fully insulated – 12 mm back board

[www.idealcombi.com](http://www.idealcombi.com)

TYPE Futura+

Rev. no. 08

Drawing no. PLU-FYL040

© Idealcombi A/S 2011. This material is the property of and copyright protected by IDEALCOMBI A/S.

**idealcombi**  
 Udvikler vinduet