


Standard løsning:
 Alu-afdækning og kile er tilvalg.
 Øvrige montage materialer leveres af montør.
 149 mm karm - KH64.
 175 mm karm - KH65.
 Skrueafstande og -placering som standard montage.



Standard solution:
Alu-flashing and wedge is optional.
 Other installation materials by installer.
 149 mm karm - KH64.
 175 mm karm - KH65.
 Fixing points and fixing areas as standard installation.

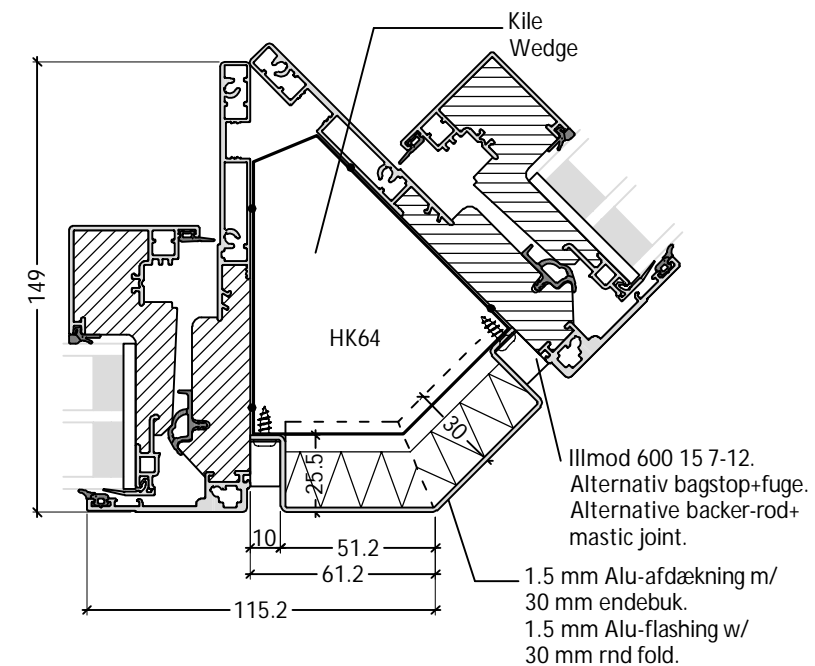

| | | |
|----|---|--------------------|
| DK | Standard hjørneløsning 45° 149/175 mm kip/dreje karm med kile | www.idealcombi.dk |
| UK | Standard corner solution 45° 149/175 mm tilt/turn frame with wedge | www.idealcombi.com |

TYPE Futura+ Rev. no. 01 Drawing no. PLU-HJL116

© Idealcombi A/S 2011. This material is the property of and copyright protected by IDEALCOMBI A/S.

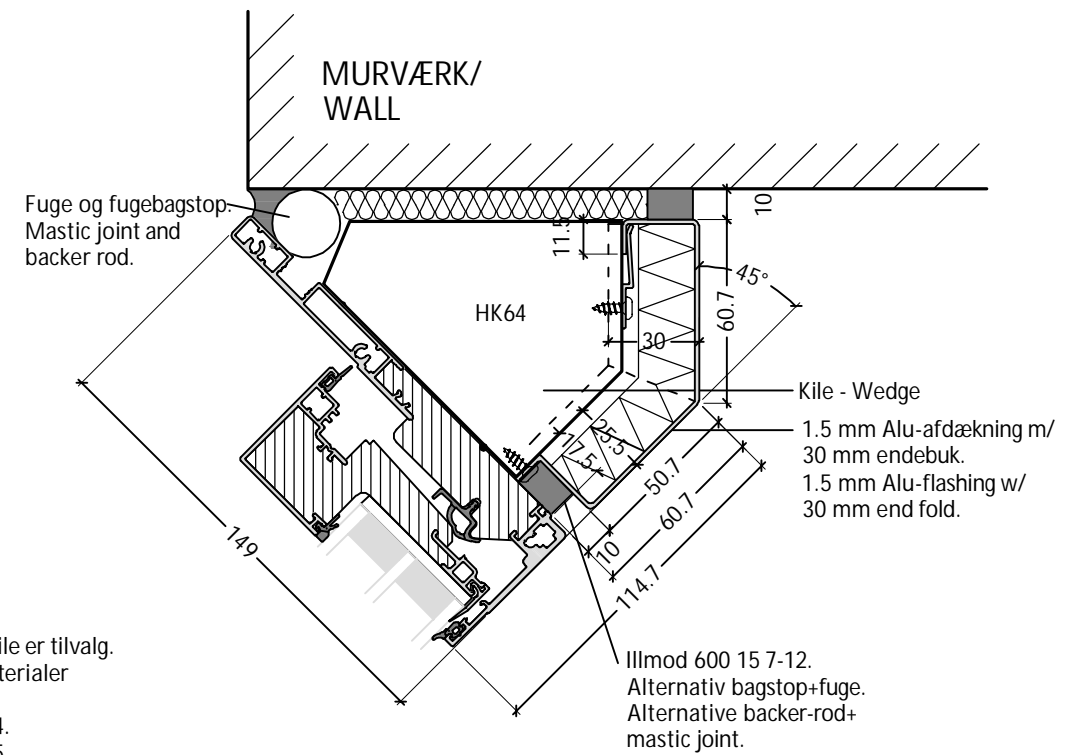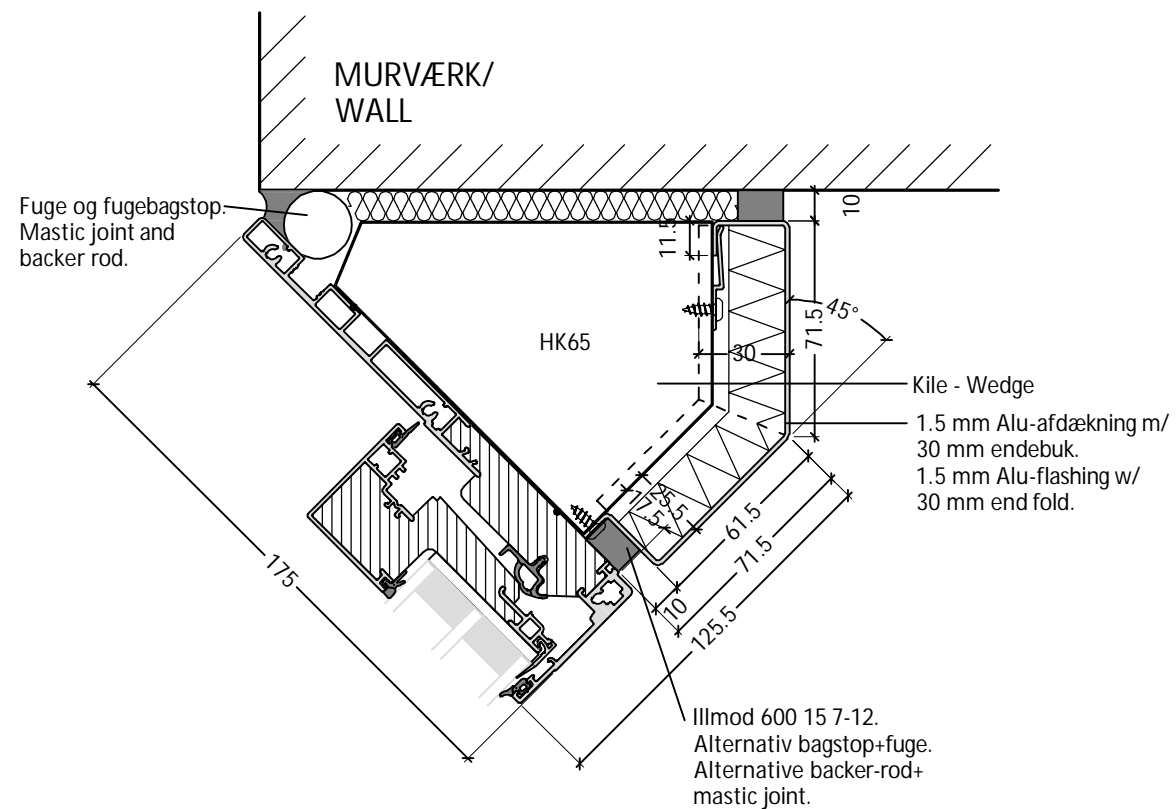

Standard løsning:
 Alu-afdækning og kile er tilvalg.
 Øvrige montage materialer
 leveres af montør.
 149 mm karm - KH64.
 175 mm karm - KH65.
 Skruer afstande og -placering som
 standard montage.

Standard solution:
Alu-flashing and wedge is optional.
 Other installation materials by
 installer.
 149 mm karm - KH64.
 175 mm karm - KH65.
 Fixing points and fixing areas as
 standard installation.

| | | |
|----|---|--------------------|
| DK | Standard hjørneløsning 45° 149/175 mm kip/dreje karm mod mur | www.idealcombi.dk |
| UK | Standard corner solution 45° 149/175 mm kip/dreje frame corner to wall | www.idealcombi.com |

TYPE Futura+ Rev. no. 01 Drawing no. PLU-HJL117

© Idealcombi A/S 2011. This material is the property of and copyright protected by IDEALCOMBI A/S.