

Standard løsning:
Alu-afdækning er tilvalg.
Special tilskårne træstolper er tilvalg.
Nogle af typerne kan bestilles ved Idealcombi.
Øvrige montage materialer leveres af montør.
149 mm karm - 74.75x74.75 mm.
175 mm karm - 100.75x100.75 mm.
Skrueafstande og skrueplacering som standard montage.

Standard solution:
Alu-flashing is optional.
Special cut wooden post is optional.
Som of the types can be ordered by Idealcombi.
Other installation materials by installer.
149 mm frame - 74.75x74.75 mm.
175 mm frame - 100.75x100.75 mm.
Fixing points and fixing areas as standard installation.

DK Standard hjørneløsning 90°
149/175 mm karm med fals - Skydedør

UK Standard corner solution 90°
149/175 mm rebated frame - Sliding door

www.idealcombi.dk

www.idealcombi.com

TYPE



Futura+

Rev. no. 01

Drawing no. PLU-HJL108

© Idealcombi A/S 2011. This material is the property of and copyright protected by IDEALCOMBI A/S.

idealcombi
Udvikler vinduet

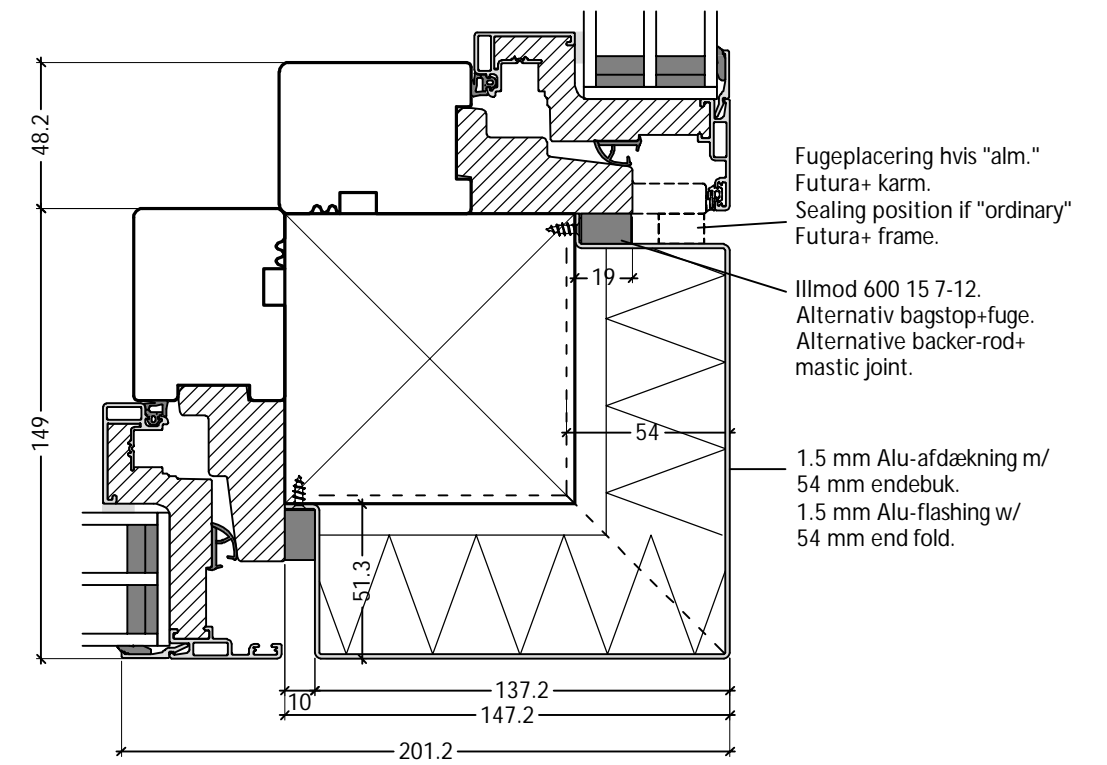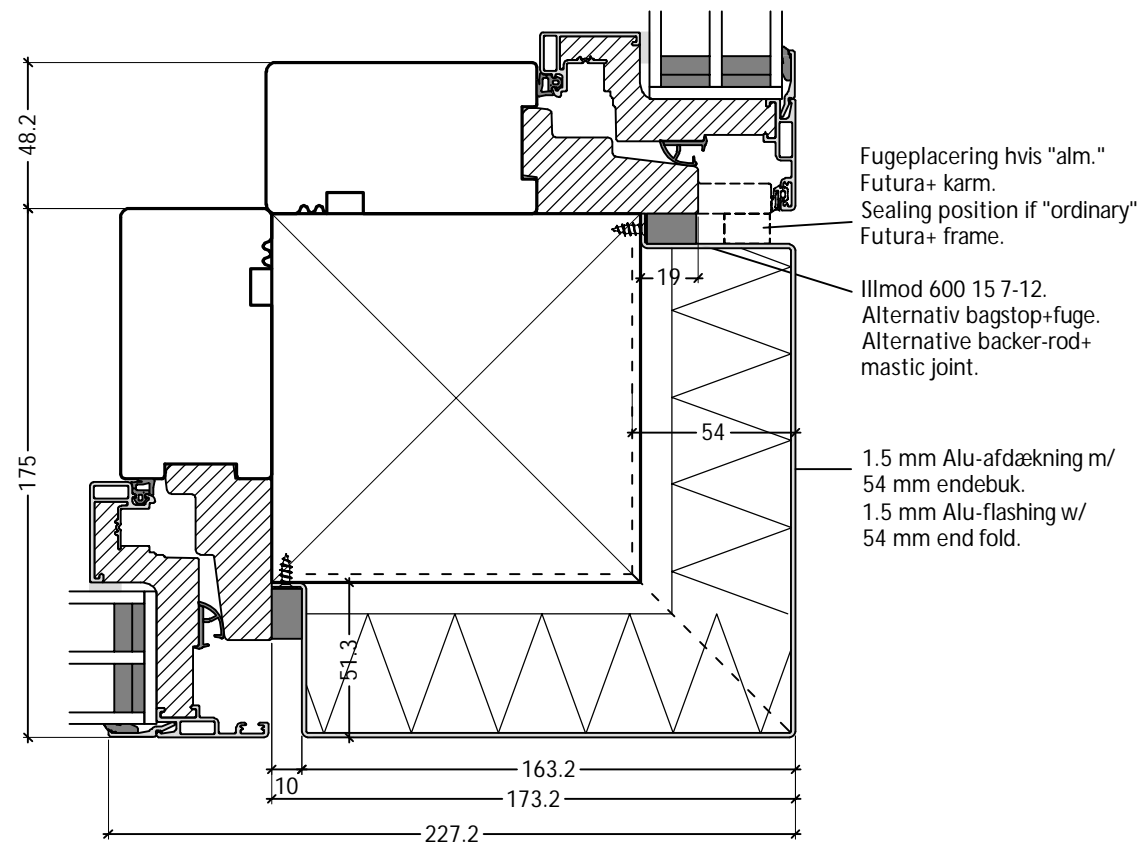

Standard løsning:
Alu-afdækning er tilvalg.
Special tilskårede træstolper er tilvalg.
Nogle af typerne kan bestilles ved Idealcombi.
Øvrige montage materialer leveres af montør.
149 mm karm - 96x96 mm.
175 mm karm - 122x122 mm.
Skrueafstande og skrueplacering som standard montage.

Standard solution:
Alu-flashing is optional.
Special cut wooden post is optional.
Som of the types can be ordered by Idealcombi.
Other installation materials by installer.
149 mm frame - 96x96 mm.
175 mm frame - 122x122 mm.
Fixing points and fixing areas as standard installation.

DK Standard hjørneløsning 90°
149/175 mm karm - Skydedør

UK Standard corner solution 90°
149/175 mm frame - Sliding door

www.idealcombi.dk

www.idealcombi.com

TYPE



Futura+

Rev. no. 01

Drawing no. PLU-HJL109

© Idealcombi A/S 2011. This material is the property of and copyright protected by IDEALCOMBI A/S.

idealcombi
Udvikler vinduet

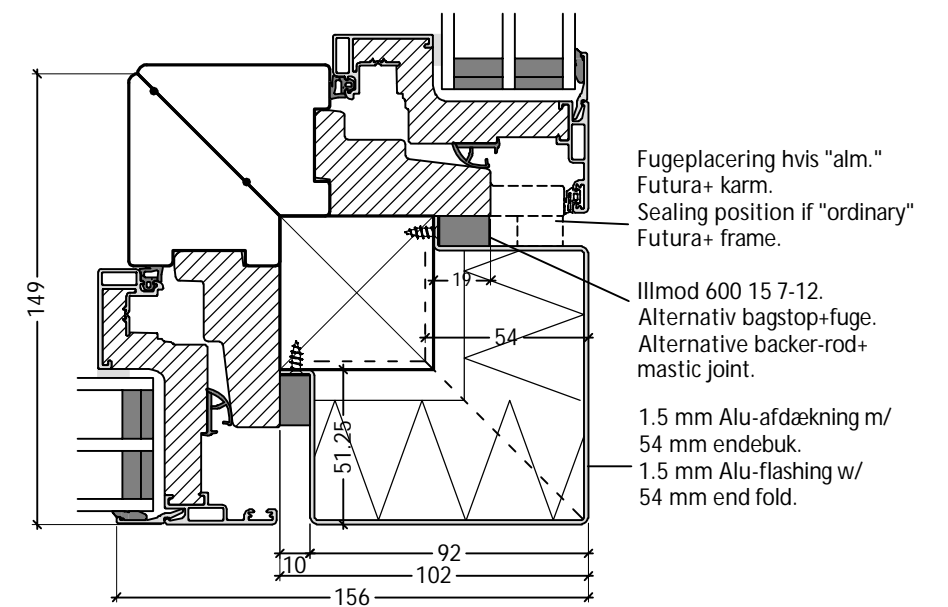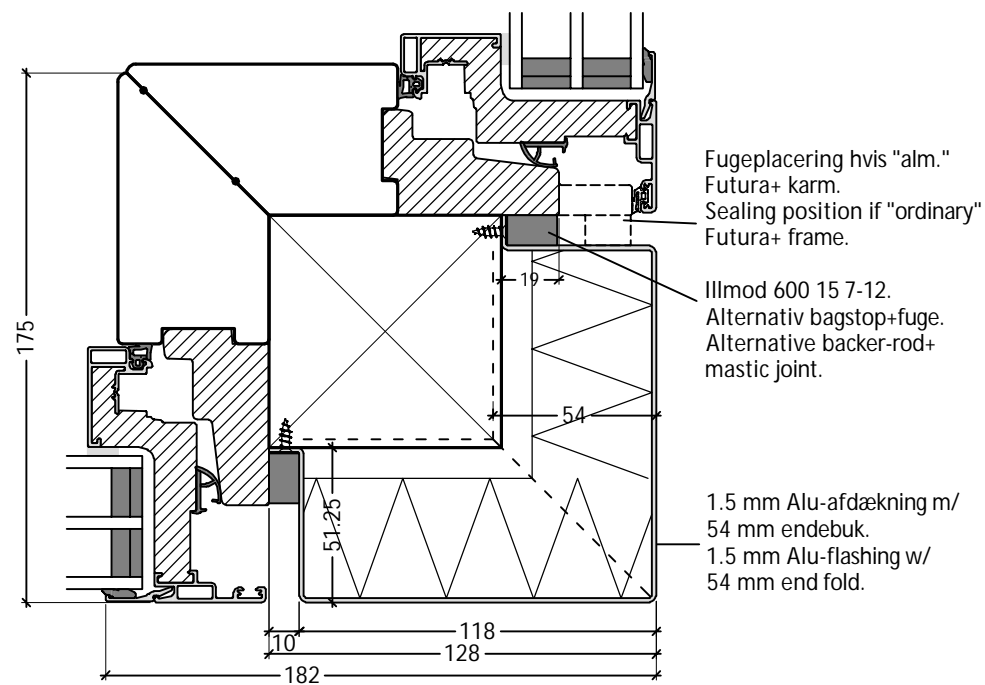

Standard løsning:
Alu-afdækning er tilvalg.
Special tilskårede træstolper er tilvalg.
Nogle af typerne kan bestilles ved Idealcombi.
Øvrige montage materialer leveres af montør.
149 mm karm - 50.75x50.75 mm.
175 mm karm - 76.75x76.75 mm.
Skruafstande og -placering som standard montage.

Alternative solution:
Alu-flashing is optional.
Special cut wooden post is optional.
Some of the types can be ordered by Idealcombi.
Other installation materials by installer.
149 mm karm - 50.75x50.75 mm.
175 mm karm - 76.75x76.75mm.
Fixing points and fixing areas as standard installation.

DK	Standard hjørneløsning 90° 149/175 mm karm med smigskæring - Skydedør	www.idealcombi.dk
UK	Standard corner solution 90° 149/175 mm bevelled frame - Sliding door	www.idealcombi.com

TYPE Futura+ Rev. no. 01
Drawing no. PLU-HJL113

© Idealcombi A/S 2011. This material is the property of and copyright protected by IDEALCOMBI A/S.