


PLU_HJL109_175

Fugeplacering hvis "alm." Futura+ karm.
Sealing position if "ordinary" Futura+ frame.

Illmod 600 15 7-12.
Alternativ bagstop+fuge.
Alternative backer-rod+ mastic joint.

1.5 mm Alu-afdækning m/ 54 mm endebuk.
1.5 mm Alu-flashing w/ 54 mm end fold.

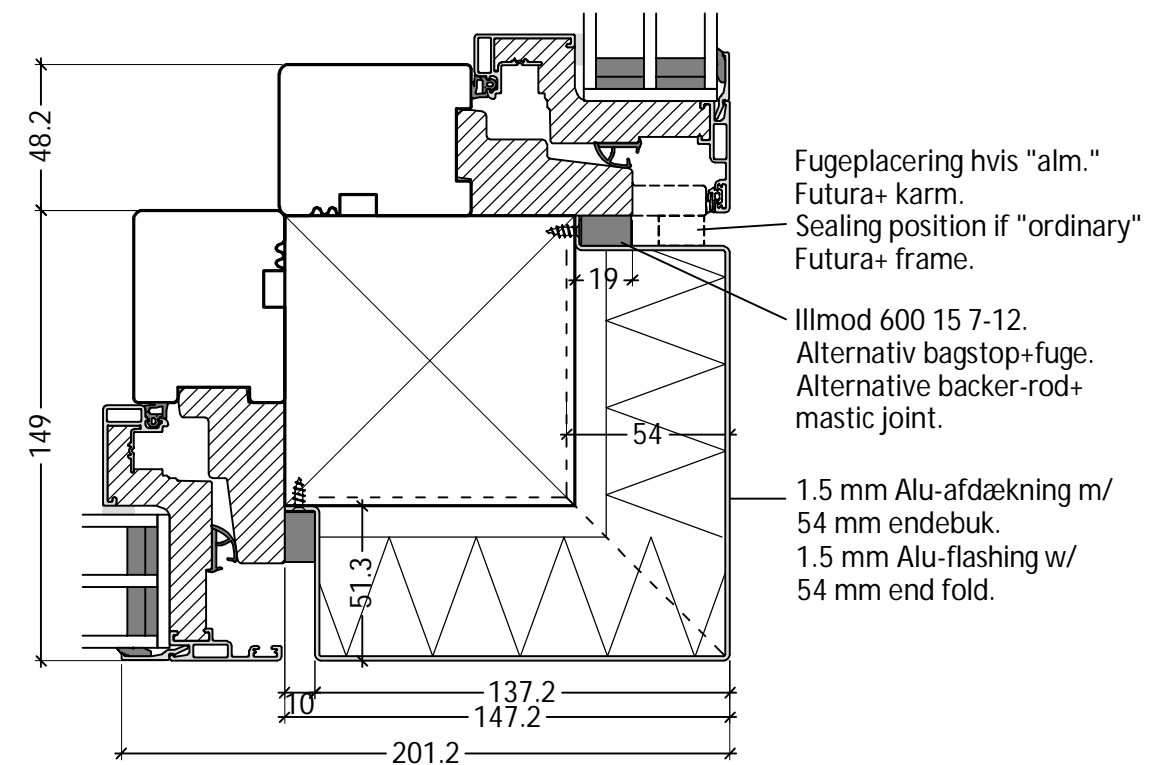

PLU_HJL109_149

Fugeplacering hvis "alm." Futura+ karm.
Sealing position if "ordinary" Futura+ frame.

Illmod 600 15 7-12.
Alternativ bagstop+fuge.
Alternative backer-rod+ mastic joint.

1.5 mm Alu-afdækning m/ 54 mm endebuk.
1.5 mm Alu-flashing w/ 54 mm end fold.

Standard løsning:
Alu-afdækning er tilvalg.
Special tilskårede træstolper er tilvalg.
Nogle af typerne kan bestilles ved Idealcombi.
Øvrige montage materialer leveres af montør.
149 mm karm - 96x96 mm.
175 mm karm - 122x122 mm.
Skrueafstande og skrueplacering som standard montage.

Standard solution:
Alu-flashing is optional.
Special cut wooden post is optional.
Som of the types can be ordered by Idealcombi.
Other instalation materials by instaler.
149 mm frame - 96x96 mm.
175 mm frame - 122x122 mm.
Fixing points and fixing areas as standard installation.

| | | |
|----|---|--------------------|
| DK | Standard hjørneløsning 90° 149/175 mm karm - Skydedør | www.idealcombi.dk |
| UK | Standard corner solution 90° 149/175 mm frame - Sliding door | www.idealcombi.com |

TYPE Futura+ Rev. no. 01 Drawing no. PLU-HJL109

© Idealcombi A/S 2011. This material is the property of and copyright protected by IDEALCOMBI A/S.