


Standard løsning:
Påføring og alu-afdækning er tilvalg.
Træ stolpe og øvrige montage materialer leveres af montør.
149 mm karm - min. 100x100 mm.
175 mm karm - min. 100x100 mm.
Opklodsning, skrueafstande og skrueplacering som standard montage.

Standard solution:
Packers and alu-flashing is optional.
Timber post and other installation materials by installer.
149 mm frame - min. 100x100 mm.
175 mm frame - min. 100x100 mm.
Wedging, fixing points and fixing areas as standard installation.

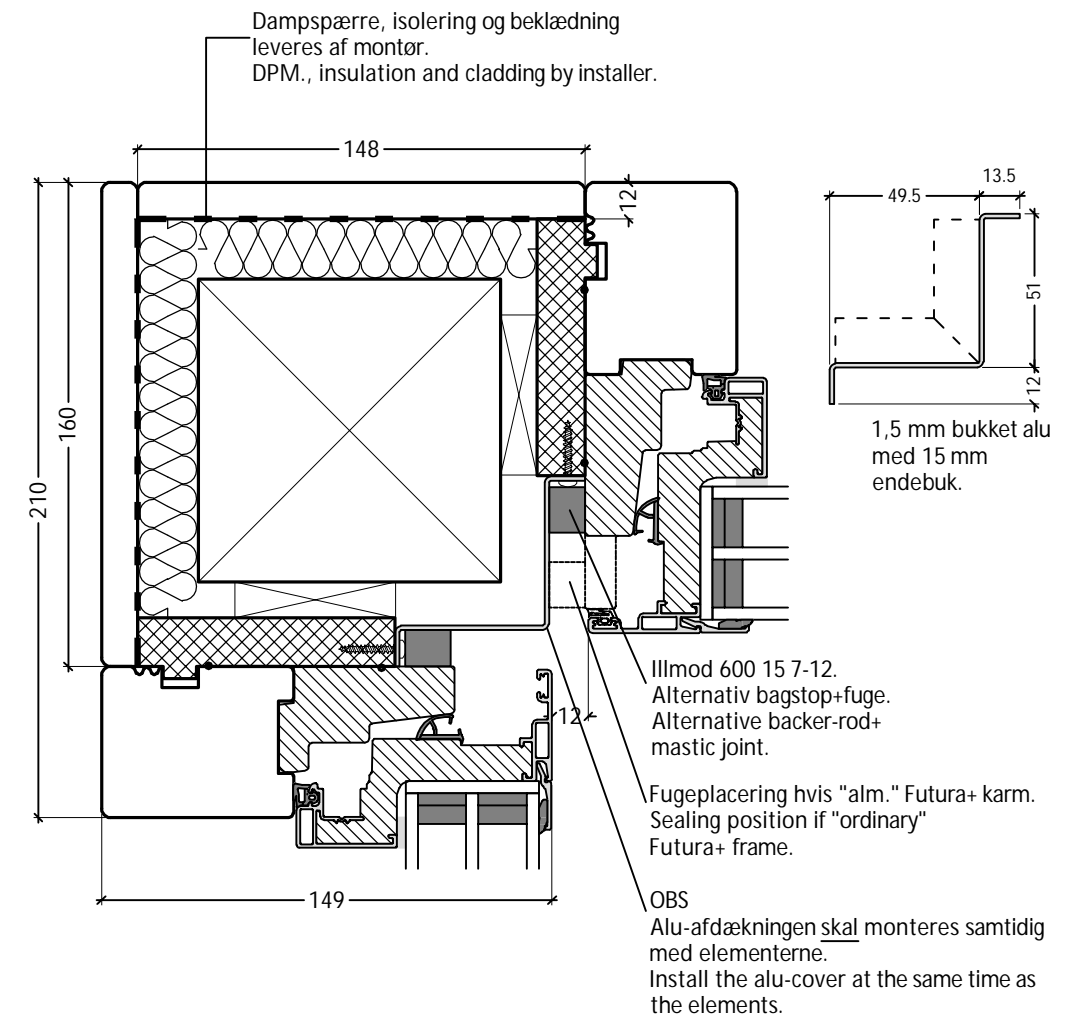

DK	Standard hjørneløsning 90° 149/175 mm karm med indadgående hjørne - Skydedør	www.idealcombi.dk
UK	Standard corner solution 90° 149/175 mm frame with internal corner - Sliding door	www.idealcombi.com