


PLU\_HJL113\_175

Fugeplacering hvis "alm." Futura+ karm.  
Sealing position if "ordinary" Futura+ frame.

Illmod 600 15 7-12.  
Alternativ bagstop+fuge.  
Alternative backer-rod+mastic joint.

1.5 mm Alu-afdækning m/  
54 mm endebuk.  
1.5 mm Alu-flashing w/  
54 mm end fold.

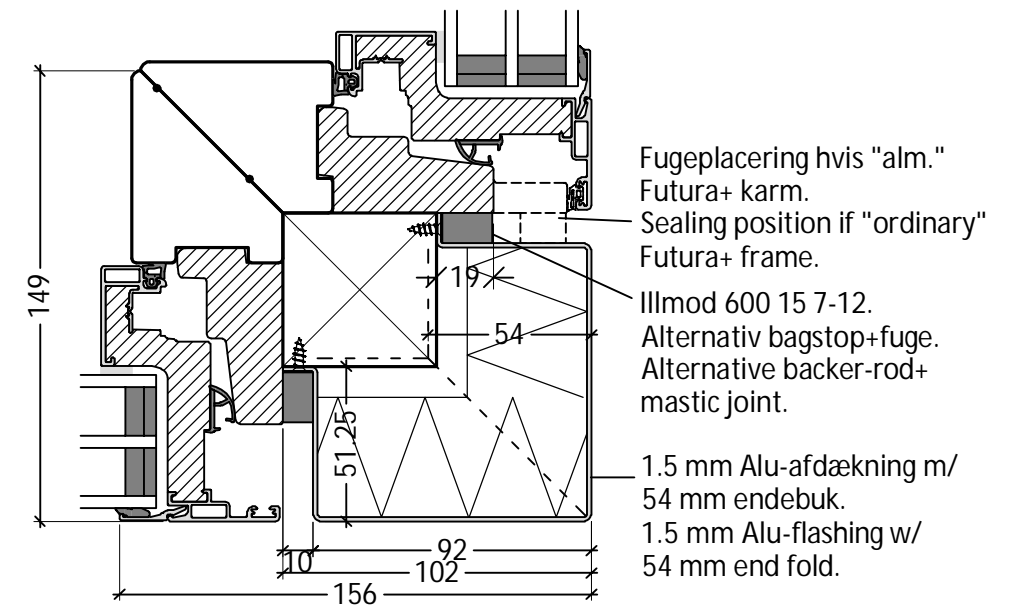

PLU\_HJL113\_149

Fugeplacering hvis "alm." Futura+ karm.  
Sealing position if "ordinary" Futura+ frame.

Illmod 600 15 7-12.  
Alternativ bagstop+fuge.  
Alternative backer-rod+mastic joint.

1.5 mm Alu-afdækning m/  
54 mm endebuk.  
1.5 mm Alu-flashing w/  
54 mm end fold.

Standard løsning:  
Alu-afdækning er tilvalg.  
Special tilskærede træstolper er tilvalg.  
Nogle af typerne kan bestilles ved Idealcombi.  
Øvrige montage materialer leveres af montør.  
149 mm karm - 50.75x50.75 mm.  
175 mm karm - 76.75x76.75 mm.  
Skrueafstande og -placering som standard montage.

Alternative solution:  
**Alu-flashing is optional.**  
Special cut wooden post is optional.  
Some of the types can be ordered by Idealcombi.  
Other installation materials by installer.  
149 mm karm - 50.75x50.75 mm.  
175 mm karm - 76.75x76.75mm.  
Fixing points and fixing areas as standard installation.

DK	Standard hjørneløsning 90° 149/175 mm karm med smigskæring - Skydedør	www.idealcombi.dk
UK	Standard corner solution 90° 149/175 mm bevelled frame - Sliding door	www.idealcombi.com

TYPE Futura+ Rev. no. 02 Drawing no. PLU-HJL113

© Idealcombi A/S 2011. This material is the property of and copyright protected by IDEALCOMBI A/S.